


# Tiger Neo N-type 78HL4-(V) 615-635 Watt MONO-FACIAL MODULE

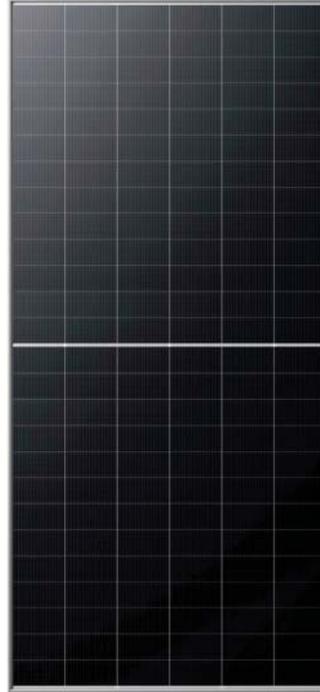

## N-Type

Positive power tolerance of 0~+3%

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems

## Key Features



### SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



### PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



### Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



### Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.




### Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



## LINEAR PERFORMANCE WARRANTY

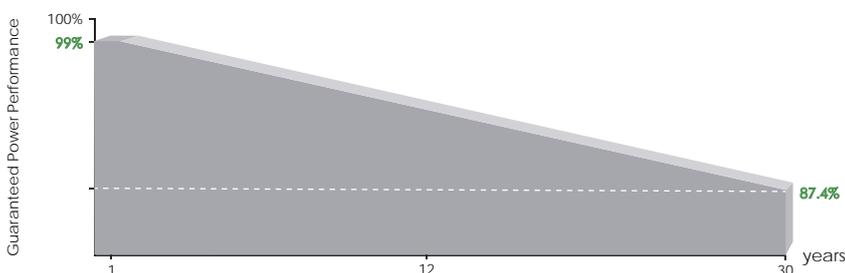


12 Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

## Engineering Drawings

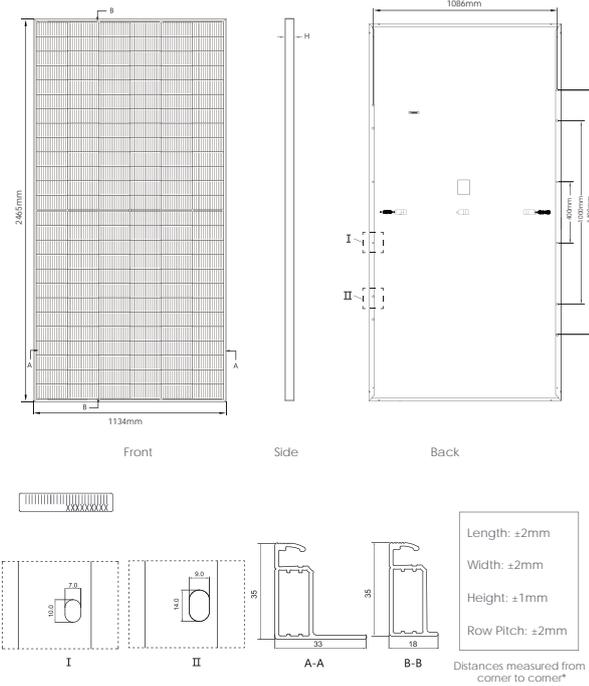


\*For detailed sizes and tolerance specification, please consult detailed module drawing

## Packaging Configuration

(Two pallets = One stack)

31pcs/pallets, 62pcs/stack, 496pcs/ 40'HQ Container

## Electrical Performance & Temperature Dependence

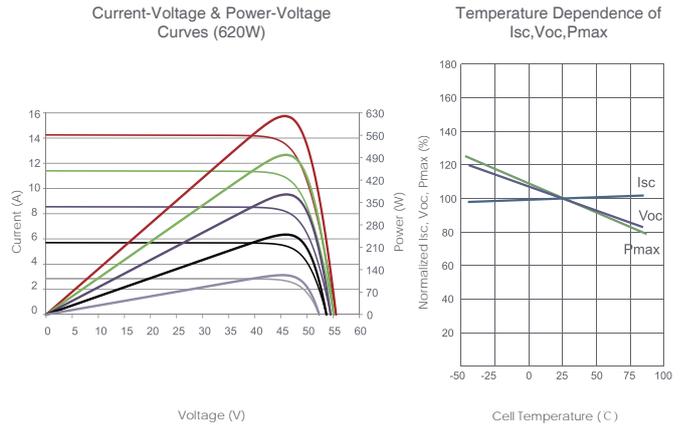

## Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	156 (2×78)
Dimensions	2465×1134×35mm (97.05×44.65×1.38 inch)
Weight	29.5 kg (65.04lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm <sup>2</sup> (+): 400mm, (-): 200mm or Customized Length

## SPECIFICATIONS

Module Type	JKM615N-78HL4		JKM620N-78HL4		JKM625N-78HL4		JKM630N-78HL4		JKM635N-78HL4	
	JKM615N-78HL4-V	JKM615N-78HL4-V	JKM620N-78HL4-V	JKM620N-78HL4-V	JKM625N-78HL4-V	JKM625N-78HL4-V	JKM630N-78HL4-V	JKM630N-78HL4-V	JKM635N-78HL4-V	JKM635N-78HL4-V
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	615Wp	463Wp	620Wp	467Wp	625Wp	471Wp	630Wp	475Wp	635Wp	479Wp
Maximum Power Voltage (Vmp)	46.81V	43.85V	46.97V	44.00V	47.14V	44.14V	47.30V	44.29V	47.46V	44.43V
Maximum Power Current (Imp)	13.14A	10.57A	13.20A	10.62A	13.26A	10.67A	13.32A	10.72A	13.38A	10.77A
Open-circuit Voltage (Voc)	56.25V	42.75V	56.40V	42.86V	56.55V	42.98V	56.70V	43.09V	56.85V	43.21V
Short-circuit Current (Isc)	13.80A	11.14A	13.86A	11.19A	13.92A	11.24A	13.98A	11.28A	14.04A	11.33A
Module Efficiency STC (%)	22.00%		22.18%		22.36%		22.54%		22.72%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000/1500VDC (IEC)									
Maximum series fuse rating	25A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.29%/°C									
Temperature coefficients of Voc	-0.25%/°C									
Temperature coefficients of Isc	0.045%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

\*STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s